



CHUNHUI

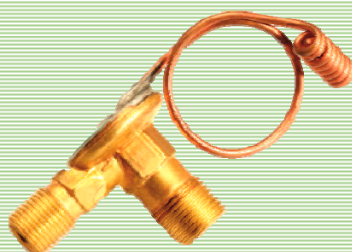

产品特点

- ◆ 调节灵敏度高
- ◆ 平衡部泄漏小
- ◆ 无啸叫
- ◆ 调节平稳、波动小
- ◆ 膜盒工作可靠、无泄漏
- ◆ 使用寿命长

Product Features

- ◆ Top sensitive to the regulating
- ◆ Little leak in the balancing part
- ◆ No whistle noise
- ◆ Steady regulation with small fluctuation
- ◆ The bellows works reliably with no leak.
- ◆ Long service life

通用规格 General specifications

- 1、适用冷媒 Apply cold media: HFC-134a/HFC-1234yf;
- 2、使用油 Apply oil: PAG/POE;
- 3、使用环境温度 Applicable ambient temperature: $-30^{\circ}\text{C} \sim 120^{\circ}\text{C}$;
- 4、动作方式 Mode of action: 根据感温部温度和低压侧压力来控制冷媒流量;
The refrigerant flow is controlled according to the temperature of the temperature sensing part and the pressure at the low pressure side
- 5、调节机构 adjusting mechanism: 通过阀体内部的调节螺丝来进行调整, 按顺时针方向调整, 则过热度增大, 逆时针方向调整则减小; Adjust it by the adjusting screw inside the valve body, the superheat will increase if it is adjusted clockwise, and it will decrease if it is adjusted anticlockwise.
- 6、充注方式 Filling mode: 按客户要求; According to customer requirements
- 7、接头尺寸 Joint size: 按客户要求; According to customer requirements
- 8、连接方式 Connection mode: 按客户要求; According to customer requirements
- 9、平衡方式 Balance mode: 按客户要求; According to customer requirements
- 10、静止过热度设定 Static superheat setting: 按客户要求; According customer requirements
- 11、安装部位 Installation position: 蒸发器组件的内部; Inside of evaporator assembly
- 12、安装状态 Installation status: 不应朝下安装, 允许从下朝上横向旋转 90° 。
It should not be installed downward. It is allowed to rotate 90° horizontally from bottom to top.

电磁热力膨胀阀 Solenoid expansion valve



电磁热力膨胀阀 Solenoid expansion valve

产品型号 Product model	冷凝器侧连接管 Connection pipe at condenser side			蒸发器侧连接管 Connection pipe at evaporator side			静止过热度 Static super heat MPa (MPa)	容量 (T) Capacity (T)	最大工作压力 (MPa) Max. working pressure (MPa)
	孔中心距 Hole center distance	进液孔 Feed hole	出气孔 Vent hole	孔中心距 Hole center distance	进液孔 Feed hole	出气孔 Vent hole			
DCQRFWH-1.0A1	35.1 ± 0.10	Φ 17+0.10 0 0	Φ 9.40 -0.10	27 ± 0.10	Φ 17+0.10 0	Φ 17+0.10 0	根据客户要求 According to customer requirement	根据客户要求 According to customer requirement	0.35 ± 0.05 或根据客户要求 0.35 ± 0.05 or as per customer requirement
	电磁阀模式: 常开/常闭 对插端型号: TYCO 1-967644-1 Solenoid valve mode: Normally open/close: Socket type: TYCO 1-967644-1								
	冷冻能力: 1.5R/T Refrigerating capability: 1.5R/T								
	静止过热度: 0.137±0.1MPa Static super heat: 0.137 ± 0.1MPa								
	额定电压: 12VDC Nominal voltage: 12VDC								
	线圈功率: 8.5W Coil power: 8.5W								
	工作电压范围: 9.0VDC-16.0VDC Working voltage range: 9.0VDC-16.0VDC								
外漏: 2g/a Outer leakage: 2g/a									

注: 本公司可根据用户需要, 设计生产其他型号的电磁热力膨胀阀。

Note: Our company can design and produce other models Solenoid expansion valve according to customer requirement.